



CLASSIC POOLS & LIGHTING



ABOUT US

Cpl India was started from 2016 with a goal in mind: to be the best place to shop for lighting for people who love modern design. At CPL, modern design doesn't mean limited design. We call our style “open-minded modern.” We know that a modern design aesthetic can apply to everything from stark-white minimalism to an eclectic space that blends old and new styles—not to mention everything in between. Modern design should have perspective. It should be comfortable, and easy on the eyes. But most importantly, it should be about you. That’s why we’re proud to offer a vast selection of design-oriented ceiling lights, wall lights, floor and table lamps, and home accessories. You’ll also find products ranging from contemporary international styles, modern interpretations of classic design, and the work of small, independent studios. We want you to be able to find the just-right product for whatever modern means in your world. Trade Program If ols and support in the industry. You’re an architect, interior designer, contractor or electrician,

Classic Pools & Lighting – Complete Lighting Solutions, Customised, Decorative, Architectural.




CLASSIC POOLS & LIGHTING



Suspended/Surface/Recessed

Linear 90

Housing made of extruded aluminium, with die cast aluminium end caps. Surface finish powder coated or natural anodised. Clear PMMA diffuser with high transmission factor. Suitable for suspended gypsum ceilings. LED available with dimmable option 1-10V or DALI.



Specification


Product	VLSP90
Watt	20W-50W
Voltage	AC 100 - 285 V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	1200x90x100mm
Rated Life Hours	L70 (50,000H)
Material Finish	Anodized / Powder Coated



Suspended/Surface/Recessed

Linear 70

Housing made of extruded aluminium, with die cast aluminium end caps. Surface finish powder coated or natural anodised. Clear PMMA diffuser with high transmission factor. Suitable for suspended gypsum ceilings. LED available with dimmable option 1-10V or DALI.



Specification

Product	VLSP7090
Watt	20W-50W
Voltage	AC 100 - 285V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	1200mmX70mmX90mm
Rated Life Hours	50000 Hrs
Material Finish	Anodized / Powder Coated



olutions, Customised, Decorative, Architectural

Suspended/Surface/Recessed

Linear 50

Grade Ceiling suspended mount linear LED Luminaire. Housing made of high pressure extruded aluminum construction, Die-cast aluminum end caps with no visible screws. UV and Corrosion resistance, with durable, anti-fading and available with different color body finish.



Specification

Product	VLSP5080
Watt	20W-50W
Voltage	AC 100-285V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	1200x50mmx80mm
Rated Life Hours	50000 Hrs
Material Finish	Anodized / Powder Coated



90° Corner



90° Horizontal Inside



135° Vertical Inside



90° Vertical Inside



T Section



X Section



Suspended/Surface/Recessed

Linear 35

Grade Ceiling suspended mount linear LED Luminaire. Housing made of high pressure extruded aluminum construction, Die-cast aluminum end caps with no visible screws. UV and Corrosion resistance, with durable, anti-fading and available with different color body finish.



Specification

Product	VLSP3535
Watt	20W
Voltage	AC 100-285 V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	1200x35x35mm
Rated Life Hours	L70 (50,000H)
Material Finish	Anodized / Powder Coated



90° Corner



90° Horizontal Inside



135° Vertical Inside



90° Vertical Inside



T Section




X Section



Suspended/Surface/Recessed

SOLO

Specification grade ceiling suspended mount LED luminaire. Housing made of CRCA Die formed housing, UV and corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting Finish in Architectural White black grey etc imported high transmittance PC diffuser specially designed for LED light sources creating smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications.



Specification


Product	VLSP4568
Watt	30W, 50W, 75W
Voltage	AC 100-285 V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	500x75mm, 600x75mm, 800x75mm
Rated Life Hours	L70 (50,000H)
Material Finish	Anodized / Powder Coated



Suspended/Surface

POLO

Specification grade ceiling suspended mount LED luminaire. Housing made of CRCA Die formed housing, UV and corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting Finish in Architectural White black grey etc imported high transmittance PC diffuser specially designed for LED light sources creating smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications.

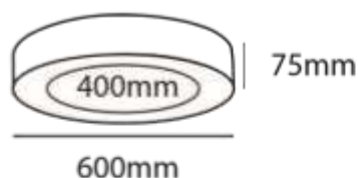

Specification

Product	VL56040
Watt	25W
Voltage	AC 100-285 V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	600x400x75mm
Rated Life Hours	L70 (50,000H)
Material Finish	Powder Coated



Suspended/Surface


Specification grade ceiling suspended mount LED luminaire. Housing made of CRCA Die formed housing, UV and corrosion resistance, with durable, anti-fading and anti-scratch

Architectural White black grey etc imported high transmittance PC diffuser specially designed for LED light sources creating smooth and uniform lighting distributions LED Dots-Free illumination), high visual

HEXA SOLO



Electrostatic Thermo-painting Finish in



comfort for all lighting applications.

Specification

Product	VLSP5689
Watt	25 w, 40w
Voltage	AC 100 - 285V
Colour Temperature	3000/4000/6000 K
CRI	>80
Dimension	500x75 mm, 600x75mm
Rated Life Hours	L70 (50,000H)
Material Finish	Powder Coated



Suspended/Surface


Voltage

Material Finish

Suspended/Surface

Trio Solo

Specification grade ceiling suspended mount LED luminaire. Housing made of CRCA Die formed housing, UV and corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting Finish in Architectural White black grey etc imported high transmittance PC diffuser specially designed for LED light sources creating smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications.



Specification

Product	VL5PTS45
Watt	20/30/50W
Voltage	AC 100-285 V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	400mm X 75mm, 500mm X 75mm
Rated Life Hours	L70 (50,000H)
Material Finish	Powder Coated



Suspended/Surface

Trio Polo

Specification grade ceiling suspended mount LED luminaire. Housing made of CRCA Die formed housing, UV and corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting Finish in Architectural White black grey etc imported high transmittance PC diffuser specially designed for LED light sources creating smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications.



Specification


Product	VL5PTP45
Watt	20W
Voltage	AC 100-285 V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	500x85mm, 800x85mm
Rated Life Hours	L70 (50,000H)
Material Finish	Powder Coated



Suspended/Surface

Trigonal

Housing made of extruded aluminium, with die cast aluminium end caps and CRCA with soft corner.. Surface finish powder coated or natural anodised. Clear PMMA diffuser with high transmission factor. Suitable for suspended gypsum ceilings. LED available with dimmable option 1-10V or DALI.



Specification

Product	VLSP600
Watt	25W
Voltage	AC 100 -285 V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	600x80mm
Rated Life Hours	L70 (50,000H)
Material Finish	Powder Coated



Suspended/Surface

Open Polo

Specification grade ceiling suspended mount LED luminaire. Housing made of CRCA Die formed housing, UV and corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting Finish in Architectural White black grey etc imported high transmittance PC diffuser specially designed for LED light sources creating smooth and uniform lighting distribution (LED Dots-Free illumination), high applications.

ng



S



Product	
Watt	25W
Voltage	AC 100-285 V
	3000/4000/6000K
CRI	>80
Dimension	600x400x75mm
Rated Life Hours	L70 (50,000H)
Material Finish	Powder Coated

Suspended/Surface/Recessed

2 X2 Panel Light

2 X2 led light panels are crafted for luxury. Their powder coated aluminium extrusion and smooth borders are a perfect solution for your high-end interior lighting. Their primary usage includes lighting up of homes, office cabins etc. Applications: Offices and conference rooms homes and work tables corridors and galleries showrooms and shopping malls. Features: Long life span (50,000 hrs.) And energy saving no uv / ir radiation instant on

Specification

Product	VLSPPL6060
Watt	OK
Voltage	AC 100 -285V
Colour Temperature	3000K/4000K/6500K
CRI	>80
Dimension	600X600 mm
Rated Life Hours	(50,000H)
Material Finish	Powder Coated



Suspended/Surface/Recessed

1 X4 Panel Light

1 X4 led light panels are crafted for luxury. Their powder coated aluminium extrusion and smooth borders are a perfect solution for your high-end interior lighting. Their primary usage includes lighting up of homes, office cabins etc. Applications: Offices and conference rooms homes and work tables corridors and galleries showrooms and shopping malls. Features: Long life span (50,000 hrs.) And energy saving no uv / ir radiation instant on



Specification

Product	VLSPPL3012
Watt	45tW
Voltage	AC 100 - 285V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	300 x 1200mm
Rated Life Hours	L70 (50,000H)
Material Finish	Powder Coated



Floor Standing

Floor Standing Single

Freestanding luminaire DELITE LED single head 80%direct-20%indirect light distribution through high efficiency micro prismatic CPD diffuser with special pattern design at the bottom & transparent acrylic at the top, profile in extruded aluminum power coated white finish, integral HF electronic control gear, IP20.

Specification

Product	VLSPSS4000
Watt	40W
Voltage	AC 100 -285 V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	1298mmX420mmX360mm
Rated Life Hours	L70 (50,000H)
Material Finish	Powder Coated



Floor Standing

Floor Standing Double

Freestanding luminaire DELITE LED double head 80%direct-20%indirect light distribution through high efficiency micro prismatic CPD diffuser with special pattern design at the bottom & transparent acrylic at the top, profile in extruded aluminum power coated white finish, integral HF electronic control gear, IP20.



Specification

Product	VLSPSD5000
Watt	80W
Voltage	AC 100-285 V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	1900mmX420mmX360mm
Rated Life Hours	L70 (50,000H)
Material Finish	Powder Coated



Suspended/Surface

Cloud

Grade ceiling suspended/recessed mount LED luminaire. Housing made of CRCA Die formed housing, UV and corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting finish in Architectural White black grey etc Imported high transmittance PC diffuser specially designed for LED light sources creating smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications. Fixed direct distributions Only Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens. Simple and easy installation for every user. Available height is 90mm.

Specification


Product	VLSPC6012
Watt	40W
Voltage	AC 100-285 V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	1200mmX50mmX80mm
Rated Life Hours	L70 (50,000H)
Material Finish	Powder Coated



Suspended/Surface

Arc

Grade Ceiling Suspended mount linear LED Luminaire. Housing made of aluminum construction. UV and Corrosion resistance, with durable, anti-fading and available with different color body finish. Lighting distribution with Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications. Fixed direct distributions Only Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens. The series is also available in seamless continuous lighting system without visible dark spot or light gaps. Simple and easy installation for every user.



Specification

Product	VLSP1200
Watt	25W
Voltage	AC 100-285 V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	1200mmX80mmX80mm
Rated Life Hours	L70 (50,000H)
Material Finish	Powder Coated



Suspended

Leaf



Specification grade ceiling surface mount LED luminaire. Housing made of CRCA Die formed housing, UV and corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting finish in Architectural White black grey etc imported high transmittance PC diffuser specially designed for LED light sources creating smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications. Fixed direct distributions Only Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens. Simple and easy installation for every user.

Specification

Product	VLSPL1050
Watt	40W
Voltage	AC 100 -285 V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	1000mmX500mmX75mm
Rated Life Hours	L70 (50,000H)
Material Finish	Powder Coated



Suspended/Surface

Soft 2x2

Specification grade ceiling suspended / suspended mount LED luminaire. Housing made of CRCA Die formed housing, UV and corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting finish in Architectural White black grey etc imported high transmittance PC diffuser specially designed for LED light sources creating smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications. Fixed direct distributions Only Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens. Simple and easy installation for every user.



Specification

Product	VLSPS6060
Watt	25W
Voltage	AC 100-285 V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	600mmX600mmX75mm
Rated Life Hours	L70 (50,000H)
Material Finish	Powder Coated



Track Light

Track Light

Inground Light

Organic design with die cast housing and heatsink for efficient heat dissipation. Ideal for retail shops & restaurants. Available in ground light diamond facet reflector with silver finish housing offers uniform light distribution with white protection.



Specification

Product	VLSPTL824
Watt	8W / 16W / 24W
Voltage	AC 100 -285 V
Colour Temperature	3000/4000/6000K
CRI	>80
Dimension	None
Rated Life Hours	L70 (50,000H)
Material Finish	Powder Coated

Surface Panel (6 w,12w,15w,18w)



Lighting

ons of road
can be
cture
l and
nimizes
that only
d light

Slim Panel (6 w,12w,15w,18w)



Specification

Product	VLSPSL24150
Watt	24W, 45W, 60W, 60W, 120W, 150W
Voltage	AC 130 - 240V
Colour Temperature	300K/6500K
CRI	>80
Beam Angle	Symetric & Asyetric(Optional)
Rated Life Hours	L70 (50,000H)
Surge Protection	Upto 7.5KVA

Post Top / Flood

Flood Light

A multipurpose floodlight for the lighting of both outdoor and indoor installations wherever a compact design, and a high degree of protection is required. Excel lent opticalsystem providing optimum



Specification

Product	VLSPF30200
Watt	30W, 60W, 90W, 120W, 150W, 200W
Voltage	AC 130-240V
Colour Temperature	6500
CRI	>80
IP Rating	IP65
Rated Life Hours	L70 (50,000H)
Surge protection	Upto 7.5KVA

Spot Light (6 w,12w,15w,18w)

High

Small size
high bay s
power LED
sports faci
and under



Deep Spot Light (6 w,12w,15w,18w)



Specification

Product	VLSP70180
Watt	70W, 90W, 120W, 150W, 180W
Voltage	AC 130-140V
Colour Temperature	3000/4000/6000K
CRI	>80
Beam Angle	Symetric
Rated Life Hours	L70 (50,000H)
IP Rating	IP65



CLASSIC POOLS & LIGHTING



(VLA)



(VLB)



(VLC)



(VLD)



(VLE)



(VLF)



(VLG)



(VLH)



(VLI)



(VLJ)



(VLK)



(VLL)



(VLM)



(VLN)



(VLO)



(VLP)



(VLQ)



(VLR)



(VLS)



(VLT)



(VLU)



(VLV)



(VLW)



(VLX)



CLASSIC POOLS & LIGHTING

Decorative



(VLY)



(VLZ)



(VLA1)



(VLA2)



(VLA3)



(VLA4)



(VLA5)



(VLA6)



(VLA7)



(VLA8)



(VLA9)



(VLA10)



(VLB1)



(VLB2)



(VLB3)



(VLB4)



(VLB5)



(VLB6)



(VLB7)



(VLB8)



(VLB9)



(VLB10)



(VLC1)



(VLC2)



CLASSIC POOLS & LIGHTING



(VLC3)



(VLC4)



(VLC5)



(VLC6)



(VLC7)



(VLC8)



(VLC9)



(VLC10)



(VLD1)



(VLD2)



(VLD3)



(VLD4)



(VLD5)



(VLD6)



(VLD7)

Our Machinery



SHEARING MACHINE



POWER PRESS



BEND SAW



TAPING MACHINE



LATHE MACHINE



DRILL MACHINE



SURFACE GRINDER



CUTTING MACHINE



POWDER COATING
MACHINE



POWDER COATING
MACHINE



WELDING MACHINE
(ARGON, ARC, MIG, SPOT)



Light-Smart All About Saving


Classic Pools & Lighting

Sachin Tyagi

+91 87503 86666

 Info@cplindia.in

 www.cplindia.in

 A-121 Sector-83 Noida 201305